



EXK-16ZX1-CETCL

Cat-Eliminator Ti/ Carbon Low Mount Exhaust 2016 Kawasaki ZX-10R

Parts List

- | | | | |
|-----------------------------|---|---------------------------------------|---|
| • Carbon Silencer | 1 | • 8 x 25 mm Bolt | 1 |
| • Mid Pipe | 1 | • 8 x 25 mm Shouldered Bolt | 2 |
| • Silencer Mounting Bracket | 1 | • 8 mm Nut | 1 |
| • Carbon Hanger Strap | 1 | • 8 mm Washer | 2 |
| • Exhaust Clamp | 1 | • 12mm Lambda Bung/Washer (Installed) | 1 |
| • Spring | 1 | • 18mm Lambda Bung/Washer (Installed) | 1 |

<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>

- 1) Remove the stock muffler by loosening the clamp then remove the 10mm bolt at the passenger peg. Slide the muffler off.
- 2) Remove the four 4mm allen head bolts on the top of the rear tail section. Then carefully pull straight back and up to remove. Then remove the two 10mm bolts to remove the front seat.
- 3) Remove the exup cable by loosening the cables at the mid way adjuster on the side of the battery. **(Photo1).**
Remove the cable ends from the exup motor and the catalytic converter. **(Photo 2)** After the cables are free carefully remove them from the motorcycle. If you are using a flash tune you can remove the exup motor as well. If you are not using a flash tune leave the exup motor installed and plugged in.

- 6) Install the supplied silencer mounting bracket behind the rear set using the supplied hardware to remount the rear set to the frame. **(Photo 3)**



Photo 3

- 7) Slide the Graves silencer onto the newly installed mid pipe. Install the carbon silencer strap to the silencer. Adjust the mid pipe and silencer so the carbon strap lines up to the mounting bracket behind the rear sets. **(Photo 4)** Install the exhaust spring. Secure the carbon hanger strap to the mounting bracket with the supplied hardware. Tighten the clamp at the head pipe collector.

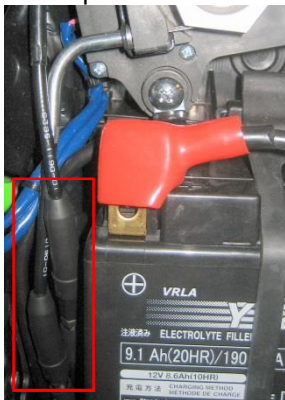


Photo 1



Photo2



Photo 4

- 4) Loosen the clamp from the catalytic converter to the head pipe collector. Remove the 6mm allen head bolt from the top of the catalytic converter to the frame. Slide the catalytic converter straight back to remove.
- 5) Install the Graves Cat Eliminator mid pipe to the head pipe collector leaving the clamp loose for now.

- 8) Be sure to wipe any dirt and finger prints off your Graves Cat Eliminator exhaust with a soft clean rag and mild cleaner before starting the engine to prevent dirt and finger prints from being etched into the surface of the system.

Equip your Ninja ZX-10R with other quality Graves parts

**Smog Block Off Plates (part #: AB018)
Fender Eliminator (part #: FEK-16ZX1-K)**

find them at:

www.GRAVESPORT.com