

SUPPLEMENTARY MANUAL


for FIT-SO1

REMOVE THE MAIN SEAT.
LOCATE THE ECU/ECM
BELOW THE MAIN SEAT.



PLUG FI TUNER PRO CONNECTOR TO THE EXPANSION PORT.

(BLACK, 8-POLE CONNECTOR WITH REMOVABLE CAP BELOW MAIN SEAT NEAR POSITIVE SIDE OF BATTERY

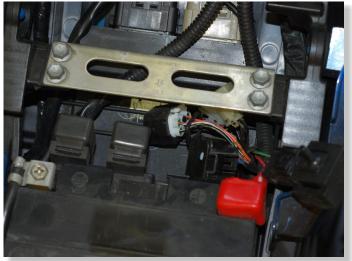

CONNECT FI TUNER PRO YELLOW/BLUE WIRE TO RPM WIRE.


(BLACK CONNECTOR OF ECU/ECM, YELLOW/BLUE WIRE, PIN#11)





CONNECT FI TUNER PRO PINK/BLACK WIRE TO TPS WIRE.

(BLACK CONNECTOR OF ECU/ECM, PINK/BLACK WIRE, PIN#6)

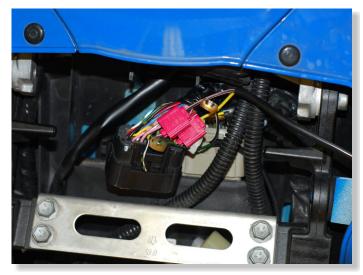

TYPICAL POSITION FOR FI TUNER PRO-

