

## SUPPLEMENTARY MANUAL

for GIPRO-SO3

REMOVE THE LEFT AND RIGHT
BLACK FRAME COVERS
BELOW THE SEAT.
REMOVE THE MAIN SEAT.



LIFT UP OR REMOVE
THE FUEL TANK.



PLUG ATRE CONNECTORS IN-LINE WITH THE GEAR POSITION SENSOR CONNECTORS.


(TRANSPARENT, 4-POLE CONNECTORS AT THE LEFT SIDE)





## CONNECT ATRE RED WIRE TO ORANGE WIRE OF REAR BRAKE LIGHT SWITCH CONNECTOR.

(TRANSPARENT, Z-POLE CONNECTOR AT THE LEFT SIDE)

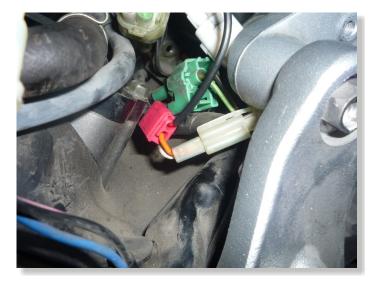

## TYPICAL POSITION FOR THE GEAR INDICATOR.

(TRE MODE: 6TH GEAR MAP)

