

SUPPLEMENTARY MANUAL

for GPX-YO1

REMOVE THE MAIN SEAT.
REMOVE THE TANK COVER.
LIFT UP OR REMOVE THE
FUEL TANK.



PLUG GPX CONNECTORS IN-LINE
WITH THE SPEED SENSOR
CONNECTORS.

(WHITE, 3-POLE TRIANGULAR CONNECTORS AT LEFT SIDE BELOW FUEL TANK)



CONNECT GPX BLACK/GREEN WIRE TO

GRAY WIRE OF CRANKSHAFT POSITION SENSOR CONNECTOR.


(TRANSPARENT, 2-POLE CONNECTOR BELOW FUEL TANK)





CONNECT GPX RED WIRE TO BROWN WIRE OF REAR BRAKELIGHT SWITCH CONNECTOR.

(BLACK, Z-POLE CONNECTOR AT RIGHT SIDE BELOW FUEL TANK)

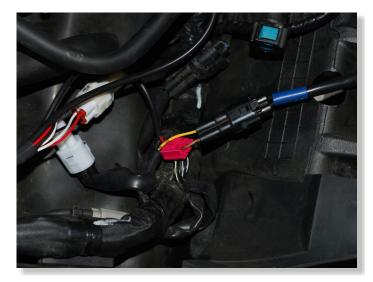

TYPICAL POSITION FOR THE GEAR INDICATOR.

