


# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### KAWASAKI NINJA 300

#### FENDER ELIMINATOR (2013-PRESENT)

- 1 Using a 4mm allen key or socket, remove side panels from both sides (picture 1)
- 2 Using a 5mm allen key or socket, remove seat bolts from both sides (picture 2)
- 3 Using a 10mm socket, remove bolts for seat bracket (picture 3)
- 4 Unplug (3) connectors for turn signals and license plate light (picture 4)
- 5 Using a 5mm allen key or socket, unbolt (4) bolts and remove stock fender (picture 5)
- 6 Remove plastic spacer and hardware from bag
- 7 Mount spacer between bolt holes, and use M6x25 bolts and tooth washers to mount turn signal bracket onto bike (picture 6/7)
- 8 Feed connectors through seat and plug back into stock harness (picture 8)
- 9 Take M6x10 bolts and tooth washers to mount your license plate (picture 9)

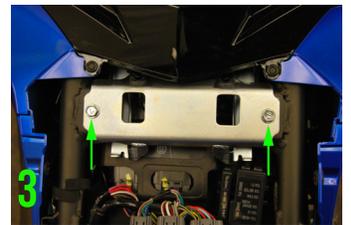

# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### FENDER ELIMINATOR (2013-PRESENT)

- 10 Install load equalizer/resistor. Wiring diagram is on bag (picture 10)
- 11 Turn bike on and test signals to make sure everything works properly
- 12 Reinstall seat bracket, side pods, and seat

