




SUPPLEMENTARY MANUAL

for QSE-1 + QSH-F4B

REMOVE THE PASSENGER SEAT.
REMOVE THE MAIN SEAT.



LIFT UP OR REMOVE
THE FUEL TANK.

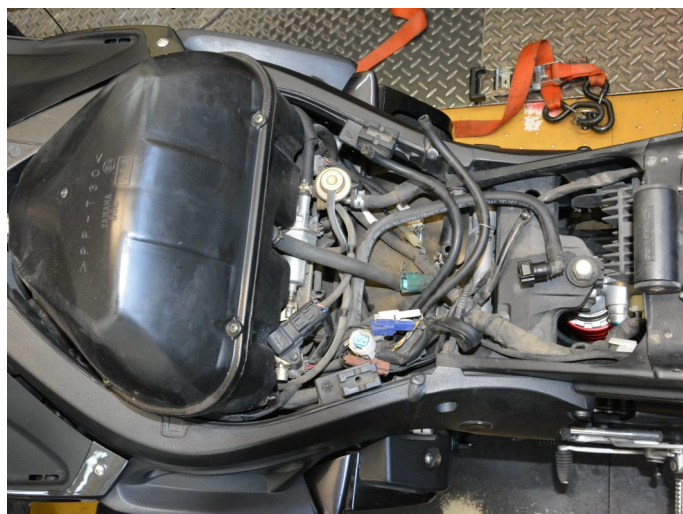

PLUG QSH CONNECTORS IN-LINE
WITH THE FUEL INJECTOR
CONNECTORS.

(GRAY, 2-POLE CONNECTORS BELOW AIRBOX)




Yamaha R6

2003-2005



**CONNECT QSH BLACK WIRE
TERMINAL TO CHASSIS GROUND.**

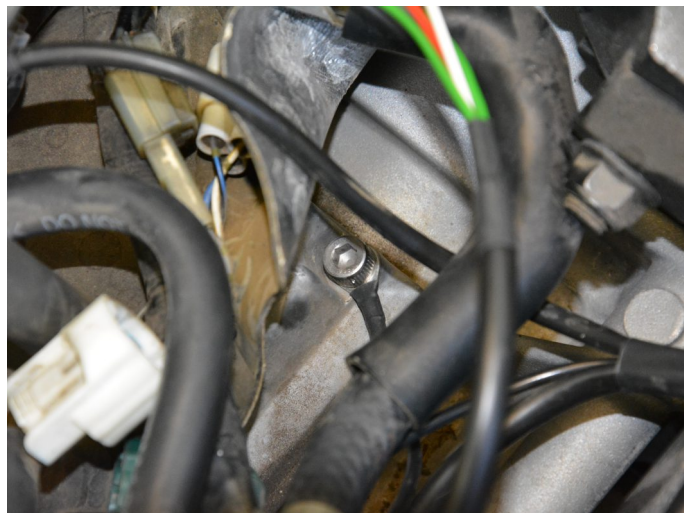

MOUNT THE QSE SENSOR.

(USE THE NEW BOLT AND WASHERS SUPPLIED WITH
THE UNIT. MAKE SURE TO PLACE ONE WASHER ABOVE
THE SENSOR AND ONE WASHER BELOW THE SENSOR.
TIGHTEN THE SCREW BY 3-4 NM.)

WHEN TIGHTENED, DO NOT TRY TO ROTATE THE
SENSOR BODY.)



**TYPICAL POSITION FOR THE
QUICKSHIFTER EASY.**

