



SUPPLEMENTARY MANUAL


for QSE-1 + QSH-P2A

REMOVE THE MAIN SEAT.
REMOVE THE FUEL TANK COVER ON
RIGHT SIDE.



PLUG QSH CONNECTORS IN-LINE
WITH THE IGNITION COIL
CONNECTORS.

(BLACK, 2-POLE CONNECTORS BELOW FUEL TANK)

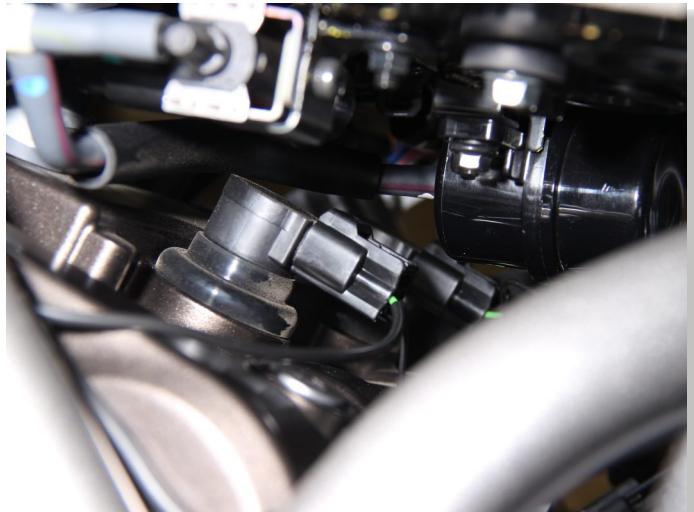

MOUNT THE QSE SENSOR.

(USE THE NEW BOLT AND WASHERS SUPPLIED WITH
THE UNIT. MAKE SURE TO PLACE ONE WASHER ABOVE
THE SENSOR AND ONE WASHER BELOW THE SENSOR.
TIGHTEN THE SCREW BY 3-4 NM.)

WHEN TIGHTENED, DO NOT TRY TO ROTATE THE
SENSOR BODY)




Yamaha MT-07

2014-2015



CONNECT QSH BLACK WIRE
TERMINAL TO CHASSIS GROUND.

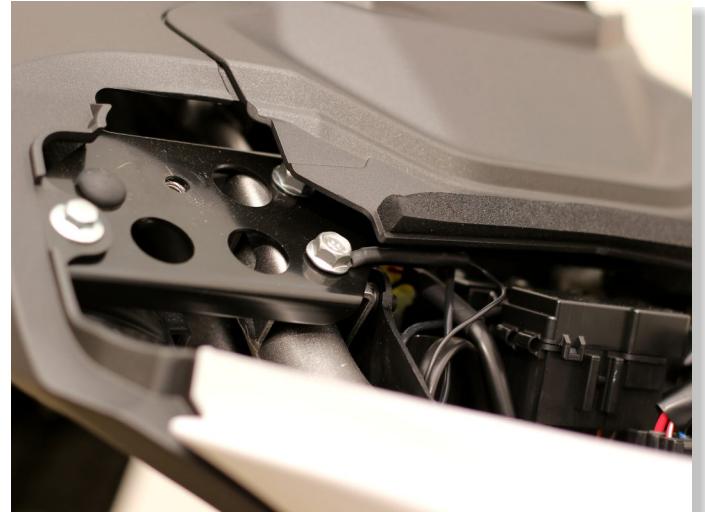

TYPICAL POSITION FOR THE
QUICKSHIFTER EASY.

