Suzuki GSX1300R Hayabusa 1999-2007

SUPPLEMENTARY MANUAL

for QSE-1 + QSX-P4B

REMOVE THE MAIN SEAT.



REMOVE THE FUEL TANK.




REMOVE THE AIRBOX.



Suzuki GSX1300R Hayabusa 1999-2007

PLUG QSX CONNECTORS IN-LINE WITH THE IGNITION COIL CONNECTORS.

(BLACK, 2-POLE CONNECTORS BELOW AIRBOX)

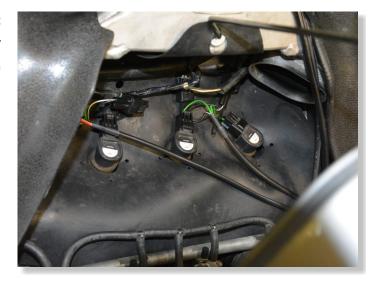

MOUNT THE QSX MODULE TO THE INNER SIDE OF THE FRAME BY THE SUPPLIED VELCRO STRIPS, AND SECURE THE CABLES WITH CABLE TIES.

(AVOID DIRECT CONTACT WITH HEAT SOURCES, LIKE THE CYLINDER HEAD.)



CONNECT QSX BLACK WIRE TERMINAL TO CHASSIS GROUND.





Suzuki GSX1300R Hayabusa 1999-2007

MOUNT THE QSE SENSOR.

(TIGHTEN THE SCREW BY 5-6 NM.

WHEN TIGHTENED, DO NOT TRY TO ROTATE THE SENSOR.

DO NOT ROUTE THE SENSOR CABLE ALONG WITH OTHER CABLES, ESPECIALLY THE QSX HARNESS, IGNITION COIL, INJECTOR, GENERATOR AND ECU WIRES.)



TYPICAL POSITION FOR THE QUICKSHIFTER EASY.

