Sissy Bar Bag S2200E



17801 S. Susana Rd. Rancho Dominguez, CA 90221 (310) 638-1222 Fax (310) 761-1234 www.saddlemen.com


WARNING:

READ ALL INSTRUCTIONS THOROUGHLY BEFORE STARTING!

You are responsible for the correct installation and safe use of this bag. Seek qualified instruction if you are uncertain about its capabilities and limitations or if you need help with installation. Use of the bag in a manner other than its intended purpose or contradictory to the warnings and instruction provided could cause loss of control of your motorcycle, possibly resulting in personal injury or death.

- Do not use this bag if any part of the mounting system has deteriorated, loosened or is beginning to fail. If you have any doubts as to the security of bag's installation, stop using it.
- After every stop check the bag to be certain that it did not shift while riding and verify
 that the straps will not contact or interfere with any part of the drivetrain, suspension,
 brakes or wheels
- Do not exceed 15 pounds total weight of bag, contents and attachments or the load limits of the motorcycle as specified in the owner's manual supplied with the bike or from the bike manufacturer.
- When the bag is removed, all loose straps must be removed from the motorcycle, or secured, so that they do not contact or interfere with any part of the drivetrain, suspension, brakes or wheels before operating the motorcycle.
- Always remove or stow all shoulder and backpack straps before attaching bag to motorcycle.

If you do not understand these instructions, the warning label attached inside the bag or how to safely and securely mount this bag, please SEEK PROFESSIONAL HELP at your qualified motorcycle dealer or by calling SADDLEMEN at 310-638-1222





- 1. Refer to diagram below. Use the included black rods to adjust the width of the SaddleStow mounting strap to fit snugly around your bike's sissy bar pad. The rods can be inserted to make the strap narrow or wide. You can also insert the rods at an angle if your sissy bar pad is not rectangular.
- 2. Make sure the rods are fully inserted, through the top securing loop and solidly into the bottom securing loop. Once in place, tightly close the velcro flap that is above each set of top securing loops.
- 3. Each bag also has two quick-release nylon straps, one located on either side of the bag. These straps must clip into the corresponding buckles on each side of the bag, and wrap around a secure, solid part of the motorcycle like a saddlebag support, frame rail, etc. Once all of the straps are connected, the bag should not move around while the motorcycle is operating.

NOTE: DO NOT connect any straps to flexible or moving parts (rubber mounted turn signals or handlebars)

NOTE: You must tuck away, tie, or cut/shorten all loose mounting straps that might interfere with operation BEFORE you ride the motorcycle.

See warning information above.


NOTE: Check bag mounting strap tightness each time you stop.

CARE AND CLEANING

Your Saddlemen bag requires almost no maintenance. For everyday cleaning, you can simply wipe down the bag with a clean, damp cloth. Make sure to keep it away from extreme heat sources like your bike's exhaust pipes.

SADDLEMEN'S ONE-YEAR WARRANTY

We guarantee our products for a period of one year after retail purchase, against defects in materials and workmanship. Damage caused by improper use or incorrect mounting is not warranted. Our warranty has other provisions and conditions; please contact

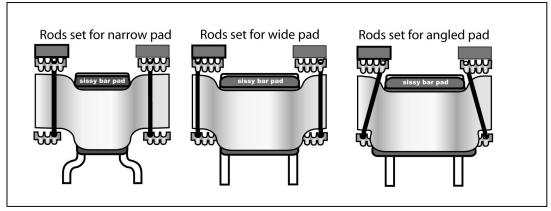

Saddlemen for full details. If your Saddlemen product is not performing to your expectations, please call us directly and our customer service staff will be happy to help. You can count on Saddlemen's quality, innovation, service and style. If your Saddlemen product is not performing to your expectations, please call us directly and our customer service staff will be happy to help. You can count on Saddlemen's quality, innovation, service and style.

