

Roll Bag R1300LXE



17801 S. Susana Rd.
Rancho Dominguez, CA 90221
(310) 638-1222 Fax (310) 761-1234
www.saddlemen.com

WARNING:

READ ALL INSTRUCTIONS THOROUGHLY BEFORE STARTING!

You are responsible for the correct installation and safe use of this bag. Seek qualified instruction if you are uncertain about its capabilities and limitations or if you need help with installation. Use of the bag in a manner other than its intended purpose or contradictory to the warnings and instruction provided could cause loss of control of your motorcycle, possibly resulting in personal injury or death.

- Do not use this bag if any part of the mounting system has deteriorated, loosened or is beginning to fail. If you have any doubts as to the security of bag's installation, stop using it.
- This bag can also be attached in many locations on the motorcycle using several different combinations of the straps provided inside the R850 or using bungee cords. It is beyond the scope of these instructions to describe the multiple locations available on the many different motorcycle brands and models. For every installation, it is critical that the bag is securely mounted so that it can not shift during operation and that no part of the bag or the mounting system can touch any moving part of the motorcycle, the drive train or controls during operation.
- After every stop check the bag to be certain that it did not shift while riding and verify that the straps will not contact or interfere with any part of the drivetrain, suspension, brakes or wheels.
- Do not exceed 10 pounds total weight of bag, contents and attachments or the load limits of the motorcycle as specified in the owner's manual supplied with the bike or from the bike manufacturer.
- When the bag is removed, all loose straps must be removed from the motorcycle, or secured, so that they do not contact or interfere with any part of the drivetrain, suspension, brakes or wheels before operating the motorcycle.
- Always remove or stow all shoulder and backpack straps before attaching bag to motorcycle.



If you do not understand these instructions, the warning label attached inside the bag or how to safely and securely mount this bag, please SEEK PROFESSIONAL HELP at your qualified motorcycle dealer or by calling SADDLEMEN at 310-638-1222

Motorcycling is an inherently dangerous activity. Installation of any accessory, including this bag, can add to the danger if it is not installed safely. You must install this product in a manner in which it will not contact any part of the drivetrain, suspension or steering, or interfere with any operation of the motorcycle. If you do not know how to do this, or have any doubts as to your ability, please see a qualified motorcycle mechanic.

PARTS LIST

1 – R1300LXE roll bag 2 – Safety Strap w/ side release buckles 2 – Safety Strap w/ side release buckles and male side release half buckle
1 – Shoulder Strap 1 - Instructions


INSTALLATION INSTRUCTIONS

1. The D Rings provided on each side of the bag are provided as anchor points for the different straps included or for bungee cords. Straps or cords routed through these rings can be used to attach the R1300LXE to the seat, rack or sissy bar using any rigid mounting points accessible on the motorcycle.
2. Two sets of webbing are sewn on the back of each bag, between the elastic covered side release buckles, that can be used to route and hold two of the supplied safety straps. These two straps can then be tightened around the sissybar while the bag is supported by the seat or rear mounted rack. Use the two other safety straps, connected into the elastic covered side release buckles, looped around and secured to accessible rigid mounting points, to hold the bag against the seat or rack and to keep the bag from moving up or down during operation of the motorcycle.
3. This bag can be installed on top of most SaddleStow™ bags manufactured by Saddlemen using the four straps attached to the top of the larger bag. Simply release the side release buckles and fit the male portion of the two side release buckles of the main bag into the female buckle counterpart placed under the elastic straps on the sides of the R850 bag and then repeat for the other male / female set on the opposite side of both bags.
4. If bag contacts a painted surface, the paint finish may be scuffed or scratched. Saddlemen offers protective tape that can be placed over paint to protect the finish if your desired mounting location causes the bag to contact painted surfaces.

NOTE: DO NOT connect any straps to flexible or moving parts (rubber mounted turn signals or handlebars)

NOTE: You must tuck away, tie, or cut/shorten all loose mounting straps that might interfere with operation BEFORE you ride the motorcycle. See warning information above.

NOTE: Check bag mounting strap tightness each time you stop.

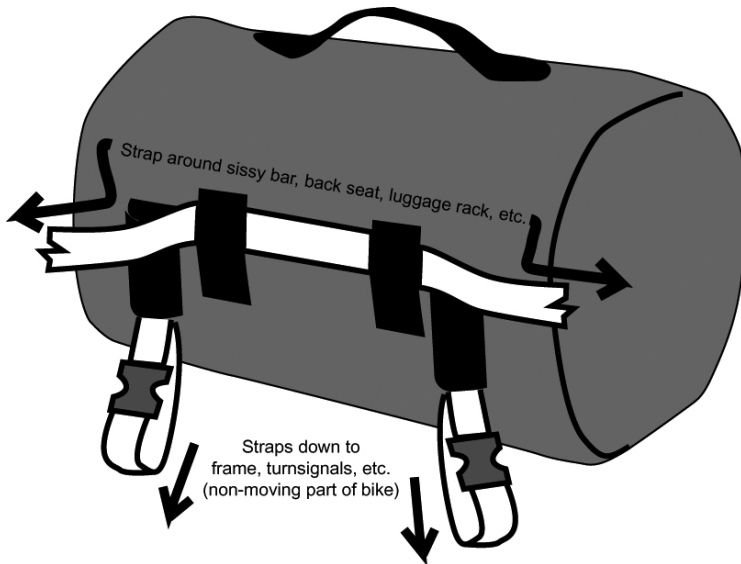

FEATURES:

R1300LXE Deluxe Roll Bag Unexpanded- 16" L x 10"W x 9.5 H" with 1300 cubic inches or 21 liter capacity; expands to 20"x 10" x 9.5" and 1500 cubic inches and 24 liter capacity

- Wide top opening for easy packing.
- Internal mesh pockets help separate and organize contents
- Rain cover for extra protection against the elements
- Rigid construction looks great empty or full.
- Top and end carry handles and shoulder strap for easy toting off bike.
- Easy access zippered pockets on both ends, perfect for maps or other items you need while on the go.
- Versatile mounting system lets you install onto a luggage rack, back seat, sissy bar, and clips right onto most Saddlemen SaddleStow™ touring bags.
- Multiple D-Rings provide easy mounting options for hard-to-fit motorcycles.
- Rigid Construction looks great empty or full.
- 1200 Denier SaddleTuff™ body panels are fully UV, water and weather-resistant.

CARE AND CLEANING

Your Saddlemen saddlebags require almost no maintenance, but to keep them looking their best, we recommend Saddlemen's Saddlebag Cleaner #3101, and Saddlebag Conditioner #3103. For everyday cleaning, you can simply wipe down the bag with a clean, damp cloth. Make sure to keep the saddlebags away from extreme heat sources like your bike's exhaust pipes.

SADDLEMEN'S ONE-YEAR WARRANTY

We guarantee our products for a period of one year after retail purchase, against defects in materials and workmanship. Damage caused by improper use or incorrect mounting is not warranted. Our warranty has other provisions and conditions; please contact Saddlemen for full details. If your Saddlemen product is not performing to your expectations, please call us directly and our customer service staff will be happy to help. You can count on Saddlemen's quality, innovation, service and style. If your Saddlemen product is not performing to your expectations, please call us directly and our customer service staff will be happy to help. You can count on Saddlemen's quality, innovation, service and style.