



**Part # FE103**

**HONDA CBR1000RR 08-09**


**Fender Eliminator Kit Contents**

Description	Qty	Description	Qty
Fender Brackets	3	6x12mm Washer	4
6x15mm Washer	4	6x12 Bolt	2
6mm Locknut	4	6x30 Button Head	2

**Carefully read instructions in their entirety before the installing the part.**

Professional installation is recommended. Always use proper safety measures during the installation of this product. Do not try to install this product without proper tools, **safety goggles, and gloves**. The motorcycle must be in a fixed, secure position before the installation process begins. VORTEX is not responsible for any part of your motorcycle for any reason. Precisely measure location of cut and if in doubt at any point please call us at 800-440-3559 before the installation process has begun

1. Remove stock OEM rear fender.

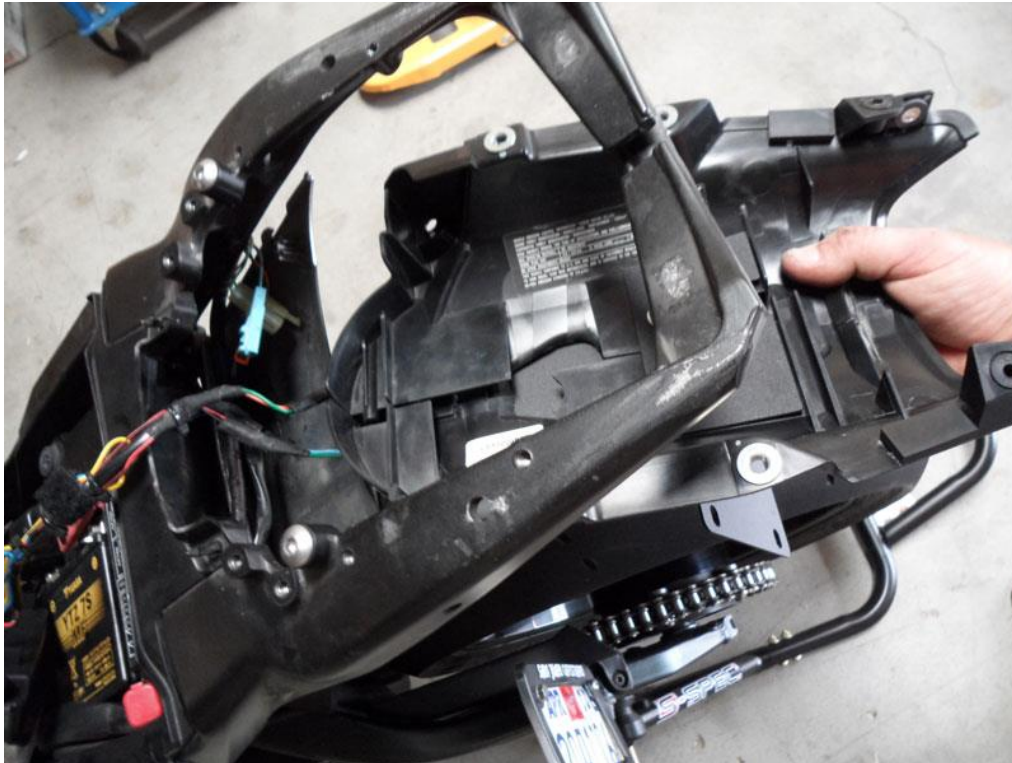

2. **MAKE SURE YOU HAVE SAFETY GOGGLES AND GLOVES ON DURING THIS PROCESS!**

Once the OEM rear fender has been removed use a cutting wheel to cut around radius of the protruding posts shown below. We use a small hand saw to finally separate the OEM posts.

NOTE: Be very precise, work slowly, and do not slip, or your stock parts may be altered in a cosmetically unappealing state.



**3. MAKE SURE YOU HAVE SAFETY GOGGLES AND GLOVES ON DURING THIS PROCESS!**

Use a sanding roll to smooth out the surface of the cut hole and cut surfaces. Sanding to uniform finish will ensure a perfect fit for your VORTEX Fender Eliminator kit. **NOTE:** Be very precise, work slowly, and do not slip, or your stock parts may be altered in a cosmetically unappealing state.




The OEM fender should look similar to the picture shown below.






**4. MAKE SURE YOU HAVE SAFETY GOGGLES AND GLOVES ON DURING THIS PROCESS!**

In this section of the install we had to make a provision for a wiring harness. We simply took a Dremel and sanding roll to make a clearance notch.

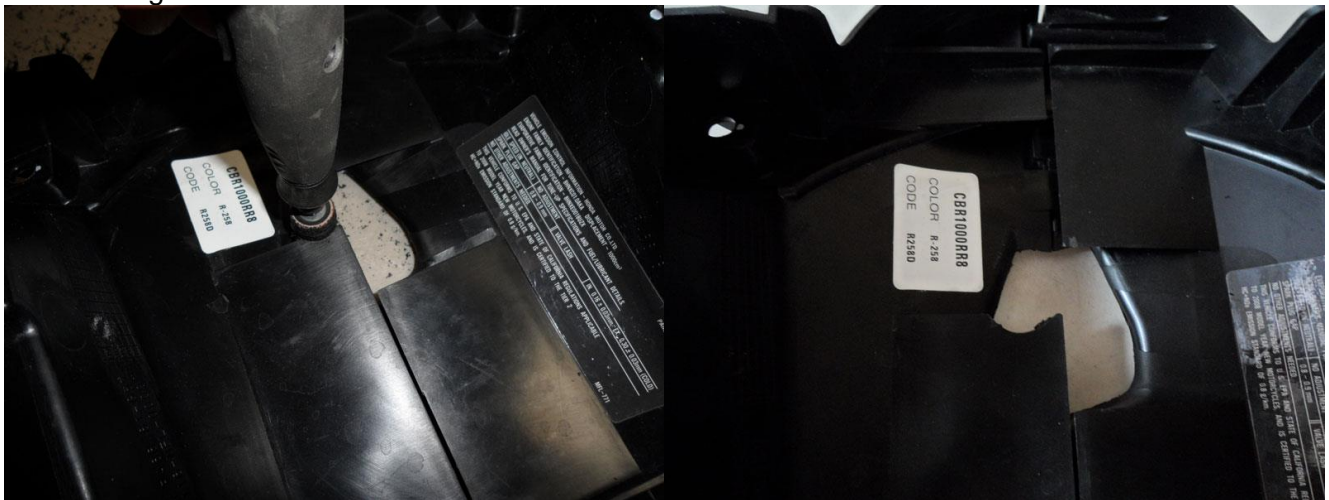

5. Using the base plate as a template mark were 6 X 30 bolts will go through. Remove base plate and use a 15/64 drill bit to drill holes.

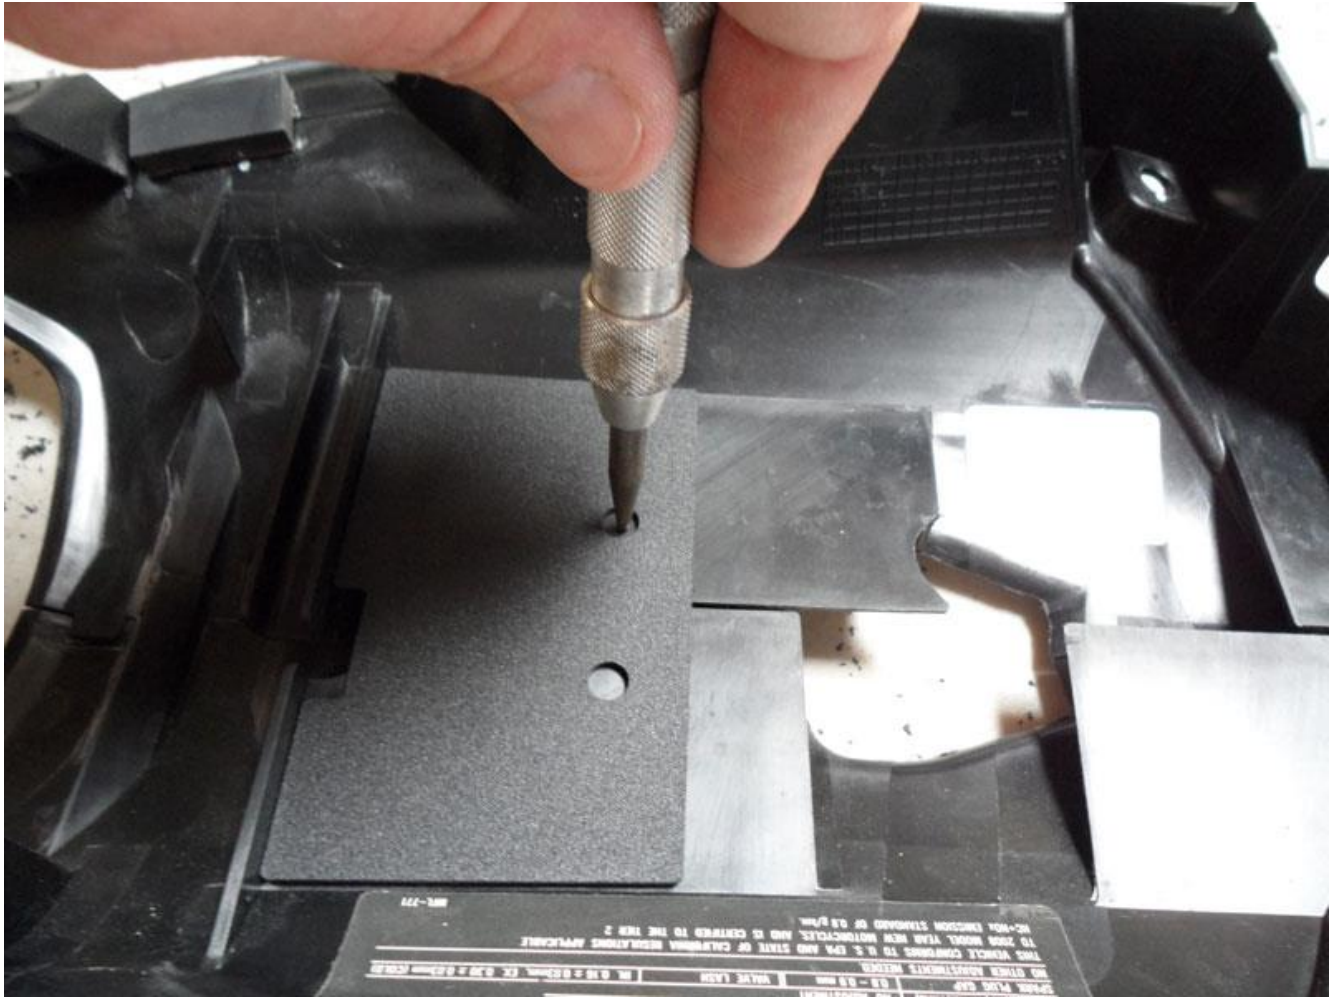

6. Assemble fender with VORTEX components as shown below. NOTE: (2) 99-Wash6x12 (two smaller washers) are used for license plate bracket for providing additional clearance.







7. Reinstall fender. The seam of the bottom support plate should line up with the bodywork as it did before removal.

