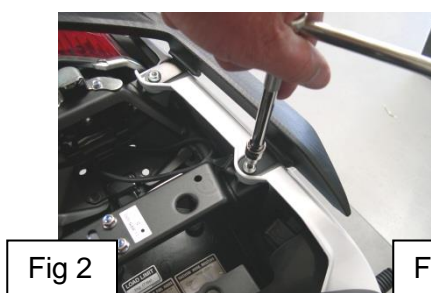
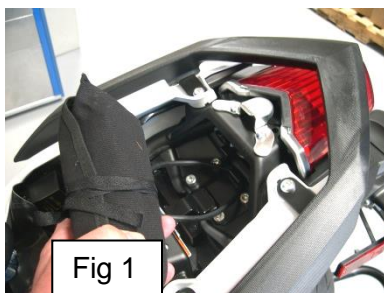


Fender Eliminator Kit Contents

Description	Quantity	Description	Quantity
Fender Bracket	1	6x12mm Washer	4
6x20 Bolt	4	6x12 Bolt	4
6X15mm Washer	12	6MM Lock Nuts	8

- Remove Passenger seat release and remove tool kit.
- Remove passenger hand rail by removing (4) 6mm bolts.
- Remove rider seat by removing (2) 6mm bolts in back of seat.
- Remove right rear body panel to expose electrical connections.
- Disconnect OEM electrical connections that are associated to the rear OEM fender.
- Remove (4) 6mm bolts that support the stock OEM rear fender.
- Remove wire loom cover, to enable you to remove stock fender, by disconnecting (1) body clip located where wire loom feeds into tail section.
- Mount plate bracket using (4) supplied 6mm socket cap bolts, (8) 6X15mm washers and (4) locknuts.
- Connect license plate light and marker lights (not included). Check for proper function.
- Reassemble.
- Remaining hardware to be used for mounting license plate.



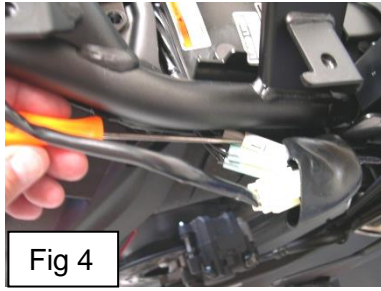


Fig 4



Fig 5