


1) **Left Side:** Remove the 8mm bolt in the center of the 1.5" Diameter hole at the bottom forward portion of the frame. Install the LH base using the included 8mm bolt and washer. **Coat with anti-sieze and torque to OEM recommended specifications (consult service manual)**

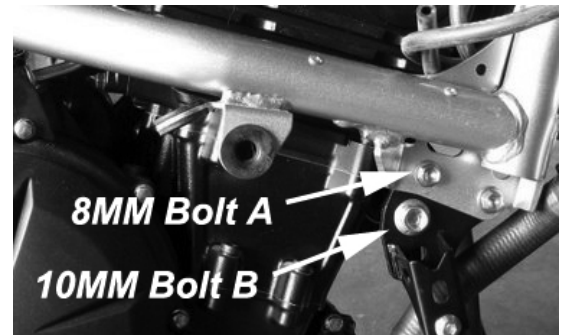

2) **Right Side:** Remove Bolts A & B (see picture). Secure the inner base for the right side using the supplied 10mm motor mount bolt and 8mm support bolt. Secure the slider puck base to the inner base using the supplied 10mm bolt. **Coat with anti-sieze and torque all bolts to OEM recommended specifications (consult service manual).**

3) Mark the fairing for drilling the holes for the 2 inch pucks. This can be done by fitting the bodywork and tracing the profile of the bases on the inside of the fairing. Some mechanics (if your bodywork is flexible) have had good luck in coating the slider base with a light coat of paint or charcoal to mark the fairing as it is pushed against the base.

4) Drill a small pilot hole in the center and test fit the bodywork to be sure that the hole is centered on the base.

5) Using a 2 inch hole saw, cut the holes for the slider puck. Alternatively, you could start with a smaller hole and open it up slowly with a drum sanding attachment to be sure that the fit is perfect.

6) Slide the plastic slider over the top of the base and secure in place using the 8mm countersunk bolt provided. the bolt passes first through the non threaded hole and then screws into the threaded hole on the far side of the base. The plastic is undersized on the far side of the slider to act as a locknut for the bolt.

105 Baldwinville Rd Winchendon, MA 01475 978-297-2977

WARNING: Improper installation and/or failure to comply with all warnings and instructions may cause a loss of control and serious injury or death. The motorcycle should be run and thoroughly inspected before use. DO NOT INSTALL OR USE THIS PRODUCT IF YOU ARE UNABLE TO DO SO IN COMPLIANCE WITH ALL INSTRUCTIONS AND WARNINGS. SEEK THE ASSISTANCE OF A TRAINED PROFESSIONAL TECHNICIAN.

IMPORTANT: The Single base goes on the left side, with the 8X35mm bolt and washer