

# YAMAHA

## 2015 R3 Street Slayer Slip-On

\*\*PLEASE NOTE: You will need to cut your stock exhaust system in order to install this unit.






### Installation:

- \* Completely remove your stock exhaust system.
- \* Mark and cut your stock exhaust (see photo attached).
- \* Re-install your header assembly (see photo attached). Leave the fasteners loose for now.
- \* Attach supplied mounting bracket to chassis (see photo attached). Leave fasteners loose for now.
- \* Slide the slip-on unit onto the stock header assembly (see photos attached) and attach to already installed mounting bracket. \*Note: we have supplied a small pouch of anti-seize for use in slip joints to help ease installation.
- \* Tighten all mounting hardware including hardware previously left loose.
- \* Re-install your O2 sensor probe. \*Note: This unit come equipped with an M18 O2 sensor fitting for use with most after market fuel management systems. We have supplied a brass adaptor if you will be using your stock sensor probe.
- \*\* This system comes with a stage one quiet insert installed (Q5). A stage two is available, part number Q4. These can be purchase from an authorized M4 dealer or direct from M4 at 972-481-9300.

<u>QTY.</u>	<u>DESCRIPTION</u>	<u>PART #</u>
____ 1	Slip-On Unit	YA3014
____ 2	M8 Flange Nut	FA-HH8N
____ 1	Barrel Clamp	BC-59
____ 1	Brass O2 Fitting Adaptor	O2B-12A
____ 1	Mounting Bracket	GS-HO416905S
____ 1	M8 x 35mm Hex Flange Bolt	FA-HF835B
____ 1	M8 x 45mm Hex Flange Bolt	FA-HF845B



YA3014

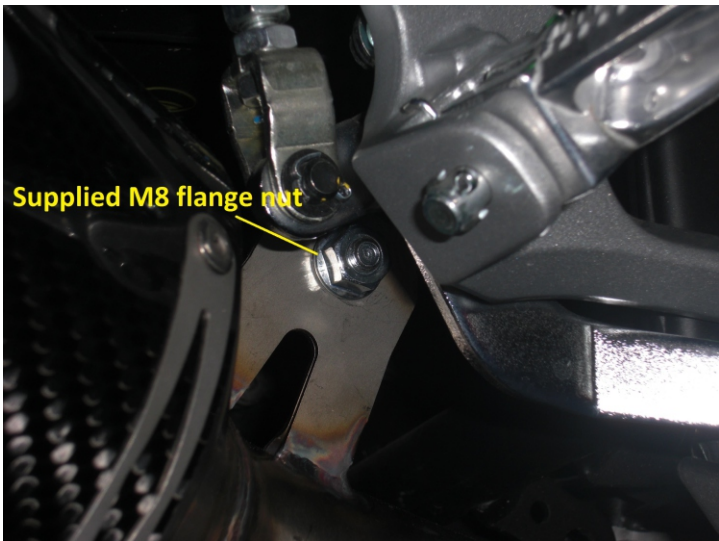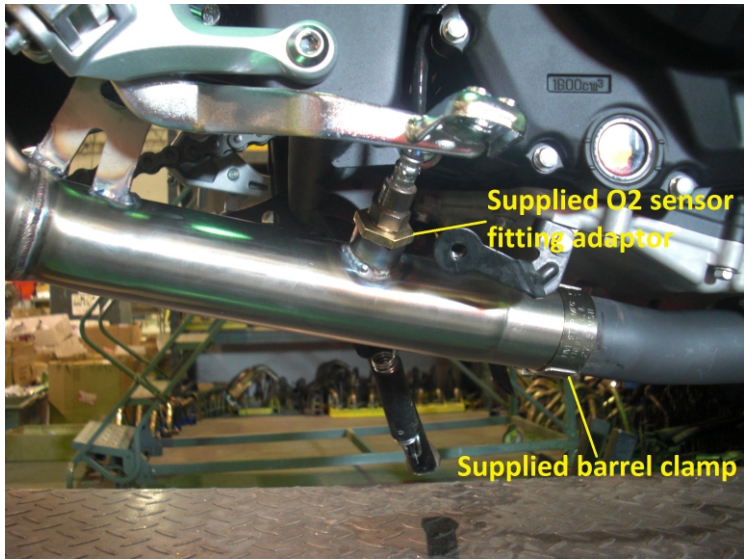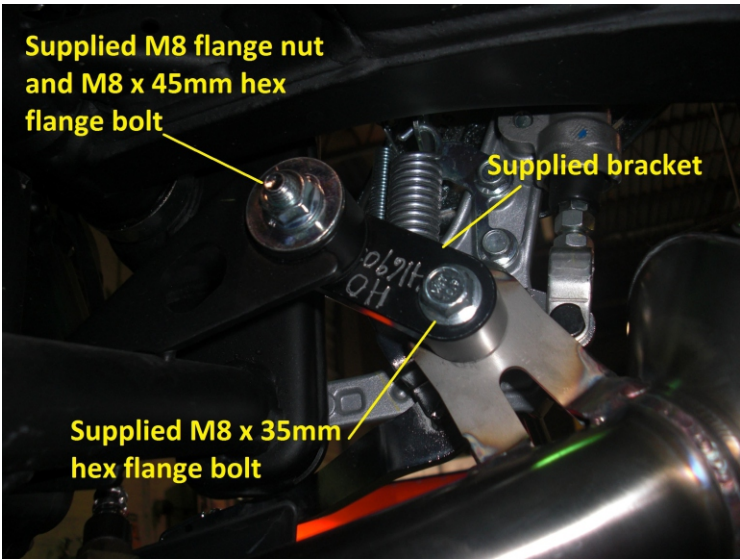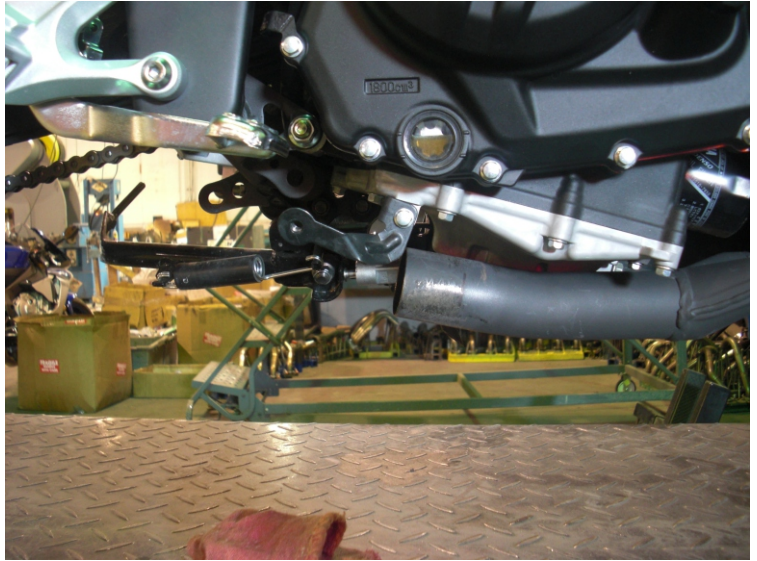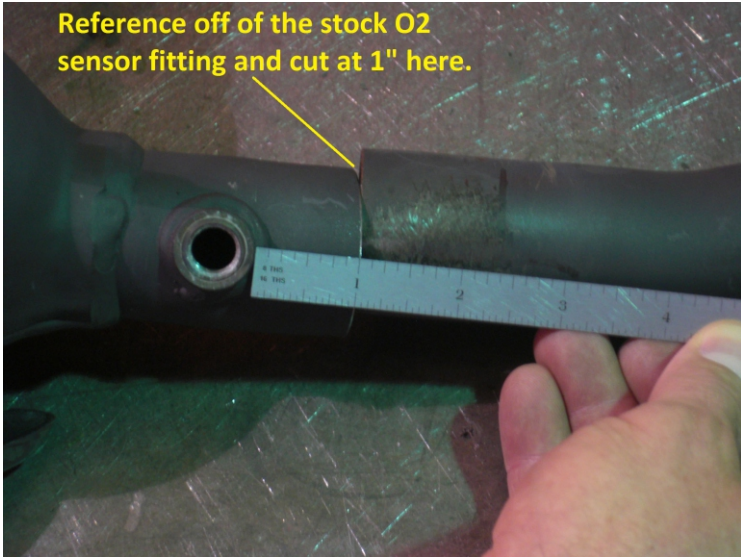



## Disclaimers

**This M4 product alters the motorcycle manufacturer's original emission controls equipment and is not suitable for use on public roads.** It is designed and sold for closed course competition use only. It is the customer's responsibility to know their local and federal laws. M4 Products will not be responsible for any incidental or consequential damages, contingent or otherwise, including expenses for injury arising directly or indirectly from the use of this exhaust system product.

If damage occurs to any item(s) in transit, it is the responsibility of the carrier. Damage claims of this nature must be made with the carrier.

## Product Warranty

M4 Products, L.L.C. Stands behind the quality of its products with a one (1) year limited warranty for defects in workmanship and materials. This warranty is provided to the original purchases only, and any warranty claims must be accompanied by an original receipt or invoice showing proof of purchase. Issues caused by improper installation or modifications, exposure to chemicals, improper care, or lack of maintenance are not covered under this warranty. Due to the nature of high performance products, it is not possible no does this limited warranty cover or guarantee the performance of any product. Any defective exhaust system will be repaired or replaced by M4 Products, L.L.C. Once the item(s) are returned and found to be defective. Please use the procedures for RETURNS in the paragraph below. M4 Products is not responsible for any other expenses incurred by the customer under this limited warranty. M4 reserves the right to determine whether the conditions of this warranty have been met, and is the sole party in determining whether this warranty is void due to improper installation or care. The duration of any implied warranties are limited to the duration of the express warranty.

## Returns

New and unused items may be returned if they are accompanied with an RA (Return Authorization) number and a copy of the original invoice. If you are in question about the product you purchased or its installation, **DO NOT START THE MOTORCYCLE. Once a system or product has been used or modified, it cannot be returned for credit or exchange.** If needed, please call your dealer or M4 Products at (972) 481-9300 for technical assistance.

## Use and Care

It is important to have your exhaust system re-packed approximately every 5,000 miles. It is important to know that different materials and components may require different cleaning methods. In general, clean your system when it is cold to prevent spots from burning into the surface, and avoid any harsh chemicals or cleaning products which are acidic. For more detailed cleaning instructions, visit the Use and Care guide on our website at [www.m4exhaust.com](http://www.m4exhaust.com).