



# YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800)634-9166 · (909)628-4722 · FACSIMILE (909)591-2198

[www.yoshimura-rd.com](http://www.yoshimura-rd.com)

## **FENDER ELIMINATOR KIT**


**070BG141600**  
**Kawasaki Ninja 1000**

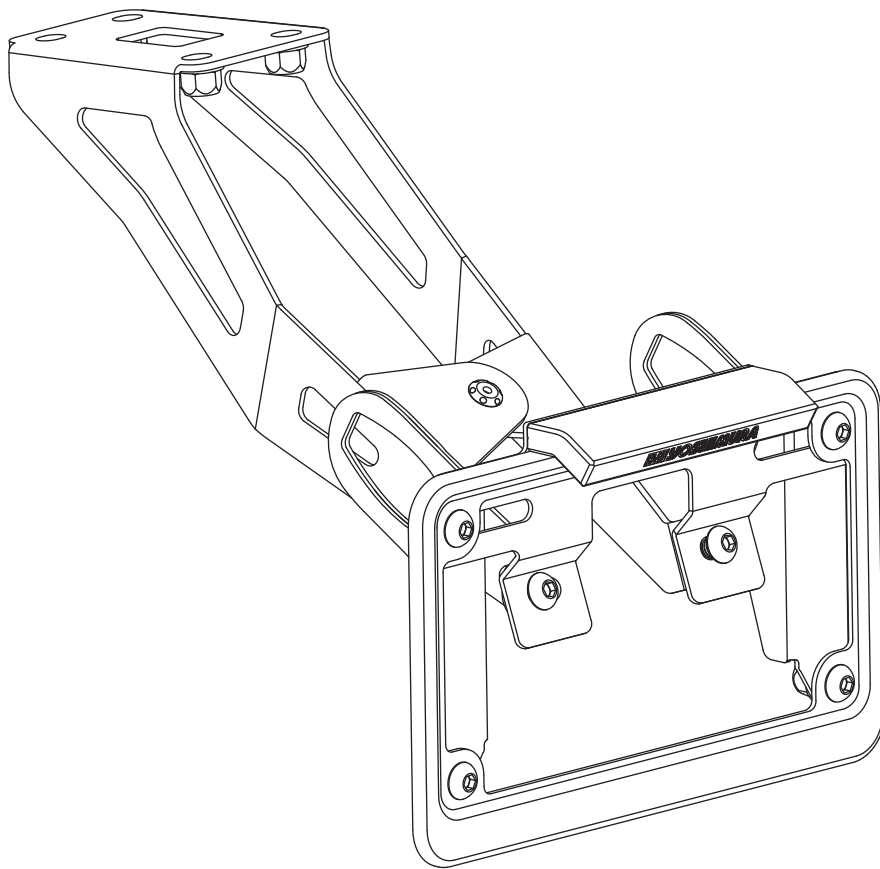

**THIS PRODUCT IS NOT DOT APPROVED.**

Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.



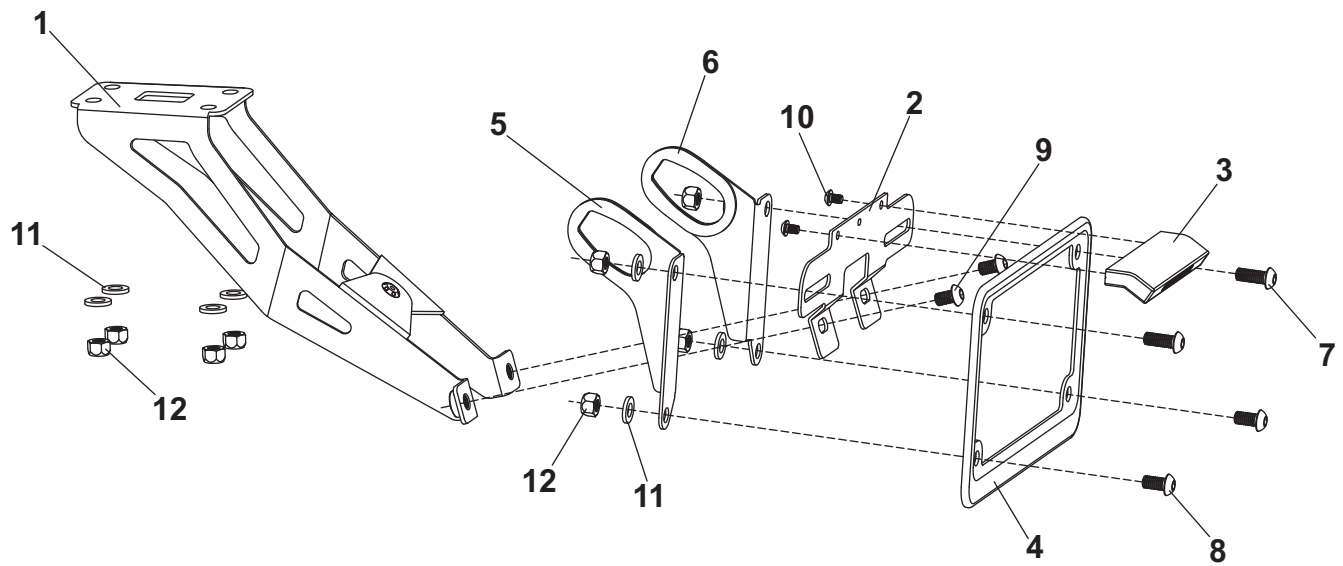


No.	Item	Description	Qty.
1	14160-FEBKT	Fender Eliminator Bracket	1
2	12200-FEBKT	License Plate bracket	1
3	070BG-LH-K	LED License Plate Light	1
4	070BG-LPF	License Plate Frame	1
5	14650-TSL-BKT	Left Turn Signal Bracket	1
6	14650-TSR-BKT	Right Turn Signal Bracket	1
7	M6X16BHS	6mm x 16mm Button Head Screw	2
8	M6X12BHS	6mm x 12mm Button Head Screw	2
9	M6X10BHS	6mm x 10mm Button Head Screw	2
10	M4X6BHS	4mm x 6mm Button Head Screw	2
11	6MMWASHER	6mm Washer	8
12	6MMLN	6mm Nylon Lock Nut	8
**	94785-01-ND	Butt Connectors	2
**	ZT-300	Cable Ties	3
**	17029	Yoshimura Sticker Sheet	1

## Removal


1. Remove passenger and rider seat.
2. Remove left and right passenger grab rails.
3. Remove the four bolts securing the rear upper cowl to the subframe.
4. Remove the tool kit to access the four fender bolts.
5. While supporting the stock fender assembly, remove the four bolts securing the stock fender to the subframe.
6. Carefully pull down on lower tail section to expose the two tapping screws.
7. Using a small phillips head screw driver, remove the two tapping screws securing the fender assembly to the lower tail section.
8. Disconnect the license plate light and turn signal wires and carefully remove the stock fender assembly.
9. Cut the stock license plate light connector from the stock fender assembly. Be sure to cut at least a 6" section of wire from the connector.
10. Disassemble the stock fender assembly and remove left and right turn signals.

## Installation

1. Install (No. 3) *070BG-LH-K*, Yoshimura license plate light onto (No. 2) *12200-FEBKT*, Yoshimura license plate bracket using (No. 10) *M4X6BHS*, 4mm button head screws provided in the kit.

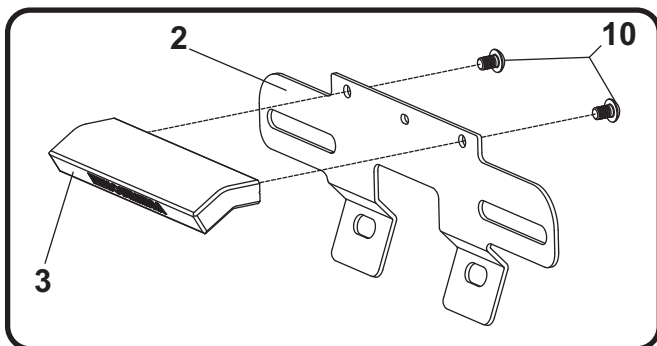

2. Lift lower tail section back up to the subframe and secure fender bracket to subframe using the stock bolt and provided (No. 11) *6MMWASHER*, washer and (No. 12) *6MMLN*, nylon lock nuts as shown in the diagram.
3. Install (No. 2) *12200-FEBKT*, license plate bracket onto (No. 1) *14160-FEBKT*, fender eliminator bracket using the provided (No. 9) *M6X10BHS*, 6mm button head screws.

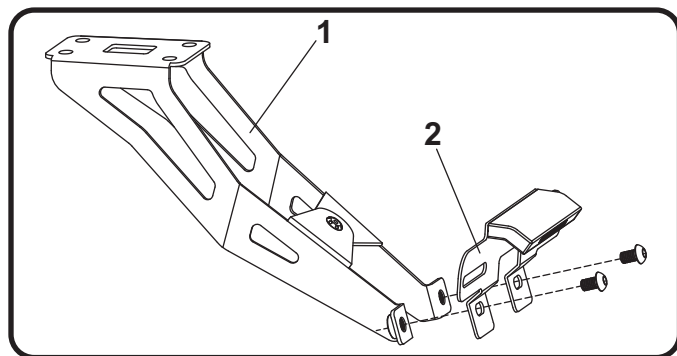

4. Using the *94785-01-ND* butt connectors provided in the kit, connect the Yoshimura license plate light wires to the stock license plate light wires as follows:  
  
Red -to- Red  
Black/Yellow Wire -to- Black
5. Install stock left and right turn signals onto (No. 5,6) *14650-TSL/R-BKT*, turn signal brackets.
6. Install (No. 5,6) *14650-TSL/R-BKT*, left and right turn signal brackets and (No. 4) *070BG-LPF*, license plate frame using the (No. 7,8) *M6X16BHS* and *M6X12BHS*, 6mm button head screws as shown in the parts diagram.
7. Route license plate light and turn signal wires under passenger seat and reconnect.
8. Re-install the rear upper cowl using the four stock bolts.
9. Re-install left and right passenger grab rails.
10. Re-install rider and passenger seat.
11. Check for proper function of license plate light, turn signals, brake light, and that all brackets and components are secure prior to riding.