

**Driven '18 kawasaki ZX 400 FENDER ELIMINATOR**  
**Part# DKZ-20/21**

**INSTALLATION INSTRUCTIONS**

**Removal**

1. Place bike on flat surface or a rear stand
2. Remove rear passenger seat see (Fig.1)
3. Disconnect wiring from rear fender
4. Remove entire rear fender assembly see (Fig.2)

**Tools Required**


- 8mm Open End Wrench
- 5mm Hex Key
- 6mm Hex Key
- 8mm Hex Key
- Needle Nose Pliers
- Screw Driver
- Blue Loctite
- Impact Gun

**Installation**


1. Install fender eliminator using (4) M6 screws providedInstallation of axle blocks.
2. Reconnect brake light wire and check for proper operation.
3. Install license plate frame.

**NOTE:**

**FOR KITS WITH TURN SIGNALS SEE INSTALLATION INSTRUCTIONS PROVIDED IN EVERY TURN SIGNAL KIT .**

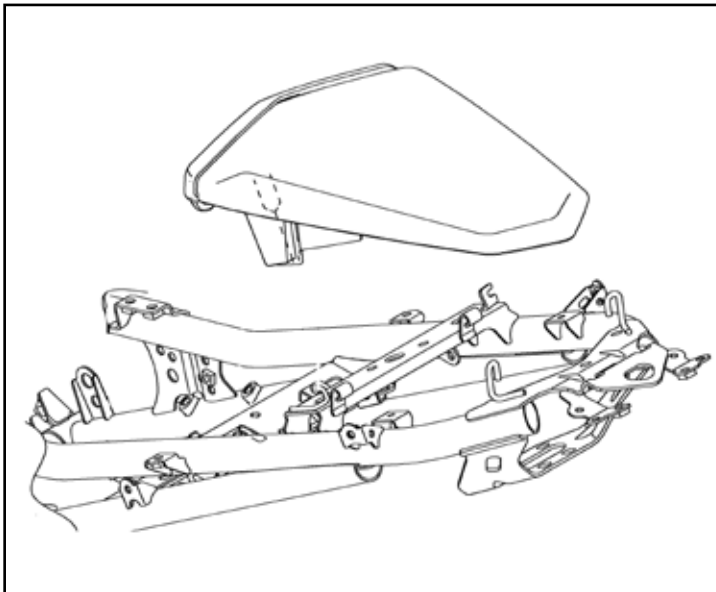

**FIGURE 1**

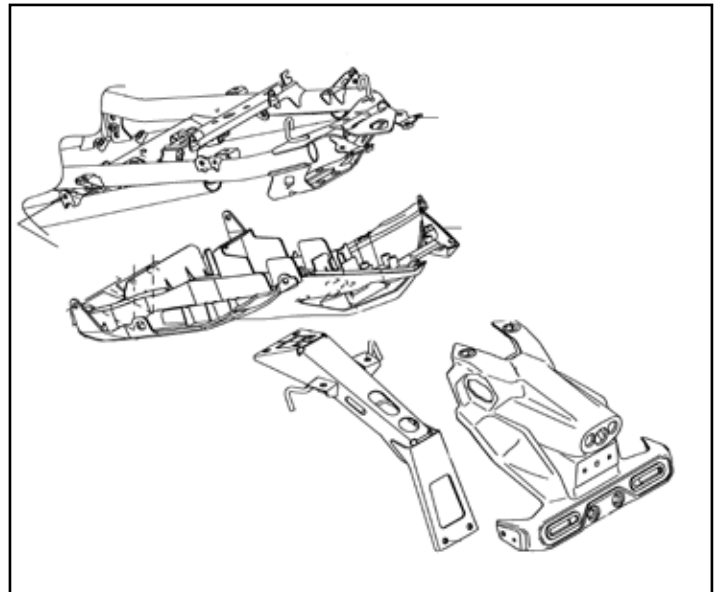

**FIGURE 2**

FOR OFF ROAD/RACE USE ONLY



SHOWN WITH TURN SIGNALS



SHOWN WITHOUT TURN SIGNALS

